


# NEMAN X - SURFACE CONTINUOUS

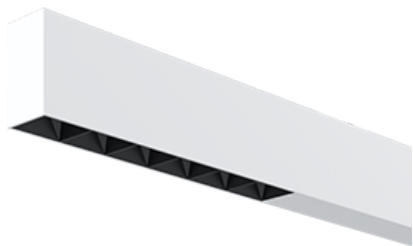

Neman-X S STA PW X3-05 D30 927 L2000 DALI  
Start module for continuous line system

Product code: NMX S STA PW X3-05 B D30 927 2000 D  
Article No.: F5SBDPCBBBD2000D


see drawings below for real representation



### COLORS



### PHOTOMETRICS




### SEGMENT TYPE LAYOUT



Start module

### TECHNICAL DRAWING



34 mm (1.34 in)

### MOUNTING

Surface type

### SPECTRUM

2700K  
CRI 90+  
3-Step MacAdam

### OPTICS

30°

### LUMINOUS FLUX\*

Luminaire: 3111 Lm  
Light source: 3576 Lm

### EFFICACY

Luminaire: 74 Lm/W  
Light source: 85 Lm/W

### LIFETIME

L90B10 60.000h

### DIMMING

DALI, PushDim

### HOUSING

Aluminum, plastic

### ELECTRICAL

Luminaire power: 42 W  
220-240 VAC 50/60 Hz  
Integrated driver


### OTHER DETAILS

IP40 ingress protection

### DIMENSIONS

Width: 34 mm / 1.34"  
Height: 60 mm / 2.36"  
Length: 2001.5 mm / 6.6'  
Distance between groups: 50 cm  
Black-out length: 477 mm / 1.57'

### LEDS LAYOUT



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.