

# ULA L RGB COLORFUL LIGHT


UlaL A1112 IEC AG OPL / RGB48/Nx G5 011W L1000  
Luminaire segment




## COLORS

 Grey housing

## PHOTOMETRICS

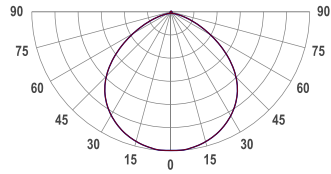


## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

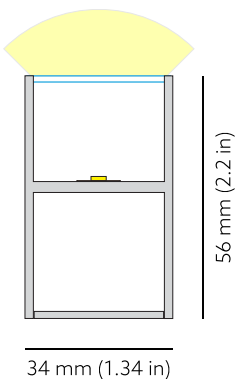

## SPECTRUM

3-Step MacAdam

## COVER

Opal

## LUMINOUS FLUX\*

Luminaire 250 lm  
Light source : 480 lm

### Per meter/feet:

Red: 54 Lm/m | 16 Lm/ft  
Green: 160 Lm/m | 49 Lm/ft  
Blue: 36 Lm/m | 11 Lm/ft

## EFFICACY

Luminaire: 22 lm/W  
Light source: 42 lm/W

## LIFETIME

L90B10 60.000h

## HOUSING

Aluminum, plastic

## ELECTRICAL

Power per meter/feet: 11.52 W/m  
Voltage: 24 VDC

## OTHER DETAILS

IP40 ingress protection  
Dimmable

## DIMENSIONS

Width: 34 mm | 1.34"  
Height: 56 mm | 2.20"  
Lenght: 1003 mm | 3.3'

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.