

# ULA L RGB COLORFUL LIGHT


UlaL A1112 IEC PW OPL / RGB48/Nx G5 011W L1000  
Luminaire segment




## COLORS

 White housing

## PHOTOMETRICS

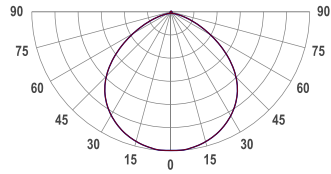


## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

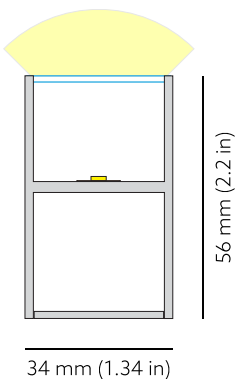

<b>SPECTRUM</b>	3-Step MacAdam
<b>COVER</b>	Opal
<b>LUMINOUS FLUX*</b>	Luminaire 250 lm Light source : 480 lm  Per meter/feet: Red: 54 Lm/m   16 Lm/ft Green: 160 Lm/m   49 Lm/ft Blue: 36 Lm/m   11 Lm/ft
<b>EFFICACY</b>	Luminaire: 22 lm/W Light source: 42 lm/W
<b>LIFETIME</b>	L90B10 60.000h
<b>HOUSING</b>	Aluminum, plastic
<b>ELECTRICAL</b>	Power per meter/feet: 11.52 W/m Voltage: 24 VDC
<b>OTHER DETAILS</b>	IP40 ingress protection Dimmable
<b>DIMENSIONS</b>	Width: 34 mm   1.34" Height: 56 mm   2.20" Lenght: 1003 mm   3.3'

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.