

ULA L RGB COLORFUL LIGHT


UlaL A1112 IEC PB OPL / RGB48/Nx G5 07W L1000
Luminaire segment




COLORS

 Black housing

PHOTOMETRICS

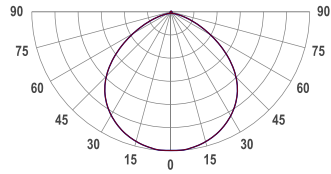


SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

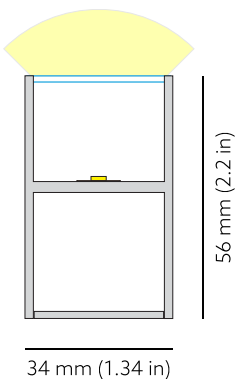

SPECTRUM	3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Luminaire 164 lm Light source : 316 lm Per meter/feet: Red: 34 Lm/m 10 Lm/ft Green: 108 Lm/m 33 Lm/ft Blue: 22 Lm/m 7 Lm/ft
EFFICACY	Luminaire: 23 lm/W Light source: 44 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, plastic
ELECTRICAL	Power per meter/feet: 7.2 W/m Voltage: 24 VDC
OTHER DETAILS	IP40 ingress protection Dimmable
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Lenght: 1003 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.