

ULA L RGB COLORFUL LIGHT


UlaL A1112 IEC AG OPL / RGB48/Nx G5 011W L1000
Start segment




COLORS

 Grey housing

PHOTOMETRICS

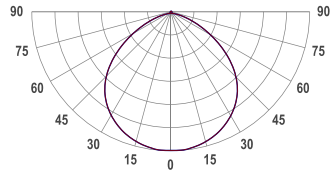


SEGMENT LAYOUT



Start type segment

TECHNICAL DRAWING

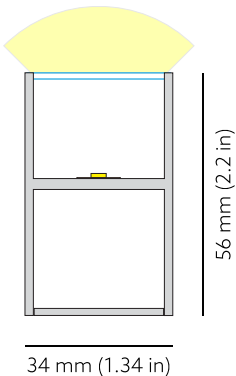

SPECTRUM	3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Luminaire 250 lm Light source : 480 lm Per meter/feet: Red: 54 Lm/m 16 Lm/ft Green: 160 Lm/m 49 Lm/ft Blue: 36 Lm/m 11 Lm/ft
EFFICACY	Luminaire: 22 lm/W Light source: 42 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, plastic
ELECTRICAL	Power per meter/feet: 11.52 W/m Voltage: 24 VDC
OTHER DETAILS	IP40 ingress protection Dimmable
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Lenght: 1001.5 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.