

# ULA L RGBW LIGHT

UlaL A1112 IEC PW OPL / RGBW48/Nx G4 014W L1000


Luminaire segment




## COLORS

 White housing

## PHOTOMETRICS




## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

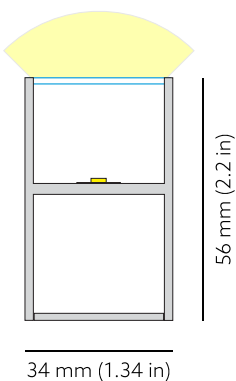

<b>SPECTRUM (WHITE LED)</b>	2200K CRI 80+ 3-Step MacAdam
-----------------------------	------------------------------------

<b>COVER</b>	Opal
--------------	------

<b>LUMINOUS FLUX*</b>	Per segment: 416 lm Light source (per segment): 799 lm  Per meter/feet: 416 lm/m   127 lm/ft RGB only: 148 lm/m
-----------------------	---

<b>EFFICACY</b>	Luminaire: 29 lm/W Light source: 55 lm/W
-----------------	---

<b>LIFETIME</b>	L90B10 60.000h
-----------------	----------------

<b>HOUSING</b>	Aluminum, plastic
----------------	-------------------

<b>ELECTRICAL</b>	Segment power: 14.4 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
-------------------	--

<b>OTHER DETAILS</b>	IP40 ingress protection Dimmable
----------------------	-------------------------------------

<b>DIMENSIONS</b>	Width: 34 mm   1.34" Height: 56 mm   2.20" Length: 1003 mm   3.3'
-------------------	---

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.