

ULA L RGBW LIGHT


UlaL A1112 IEC AG OPL / RGBW48/Nx G4 019W L1000
Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

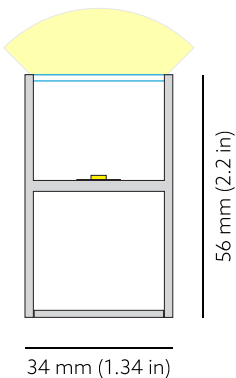

SPECTRUM (WHITE LED)	2200K CRI 80+ 3-Step MacAdam
-----------------------------	------------------------------------

COVER	Opal
--------------	------

LUMINOUS FLUX*	Per segment: 468 lm Light source (per segment): 900 lm Per meter/feet: 468 lm/m 143 lm/ft RGB only: 246 lm/m
-----------------------	---

EFFICACY	Luminaire: 24 lm/W Light source: 47 lm/W
-----------------	---

LIFETIME	L90B10 60.000h
-----------------	----------------

HOUSING	Aluminum, plastic
----------------	-------------------

ELECTRICAL	Segment power: 19.2 W Power per meter/feet: 19.2 W/m Voltage: 24 VDC
-------------------	--

OTHER DETAILS	IP40 ingress protection Dimmable
----------------------	-------------------------------------

DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'
-------------------	---

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.