

ULA L IP67 RGB COLORFUL LIGHT

UlaL.IP67 A1112 IEC PWE EOP / RGB48/Nx G5 011W L1000


Luminaire segment




COLORS

 White housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

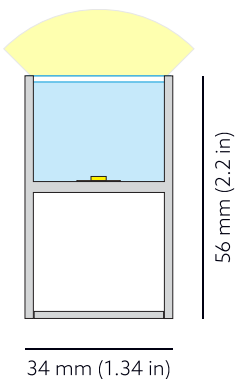

SPECTRUM

3-Step MacAdam

COVER

Opal

LUMINOUS FLUX*

Luminaire: 238 lm

Light source: 480 lm

Per meter/feet:

Red: 52 Lm/m | 16 Lm/ft

Green: 152 Lm/m | 46 Lm/ft

Blue: 34 Lm/m | 10 Lm/ft

EFFICACY

Luminaire: 21 lm/W

Light source: 42 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Power per meter/feet: 11.52 W/m

Voltage: 24 VDC

TEMPERATURE

Tc max <75°C (167°F)

Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection

Dimmable

Install in well-ventilated areas only

DIMENSIONS

Width: 34 mm | 1.34"

Height: 56 mm | 2.20"

Length: 1003 mm | 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.

All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.