

ULA L IP67 RGB COLORFUL LIGHT

UlaL.IP67 A1112 IEC PBK EOP / RGB48/Nx G5 011W L1000


Luminaire segment




COLORS

 Black housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

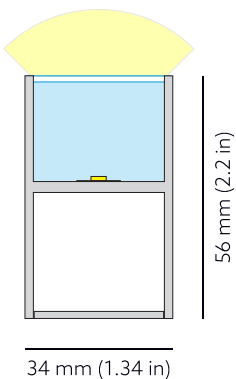

SPECTRUM	3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Luminaire: 238 lm Light source: 480 lm Per meter/feet: Red: 52 Lm/m 16 Lm/ft Green: 152 Lm/m 46 Lm/ft Blue: 34 Lm/m 10 Lm/ft
EFFICACY	Luminaire: 21 lm/W Light source: 42 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, polyurethane
ELECTRICAL	Power per meter/feet: 11.52 W/m Voltage: 24 VDC
TEMPERATURE	Tc max <75°C (167°F) Operating: -25°C...+50°C (-13°F...122°F)
OTHER DETAILS	IP67 protection Dimmable Install in well-ventilated areas only
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.