

# ULA L IP67 RGB COLORFUL LIGHT

UlaL.IP67 A1112 IEC AGY EOP / RGB48/Nx G5 07W L1000


Luminaire segment




## COLORS

 Grey housing

## PHOTOMETRICS




## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

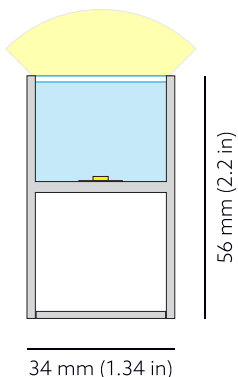

## SPECTRUM

3-Step MacAdam

## COVER

Opal

## LUMINOUS FLUX\*

Luminaire: 157 lm

Light source: 316 lm

### Per meter/feet:

Red: 32 Lm/m | 10 Lm/ft

Green: 103 Lm/m | 31 Lm/ft

Blue: 21 Lm/m | 6 Lm/ft

## EFFICACY

Luminaire: 22 lm/W

Light source: 44 lm/W

## LIFETIME

L90B10 60.000h

## HOUSING

Aluminum, polyurethane

## ELECTRICAL

Power per meter/feet: 7.2 W/m

Voltage: 24 VDC

## TEMPERATURE

Tc max <75°C ( 167°F )

Operating: -25°C...+50°C ( -13°F...122°F )

## OTHER DETAILS

IP67 protection

Dimmable

Install in well-ventilated areas only

## DIMENSIONS

Width: 34 mm | 1.34"

Height: 56 mm | 2.20"

Length: 1003 mm | 3.3'

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are  $\pm 15\%$ . Allowed measurement uncertainty  $\pm 7\%$ .

All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.