

ULA L IP67 RGBW LIGHT

UlaL.IP67 A1112 IEC AGY EOP / RGBW48/Nx G4 014W 825 L1000


Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

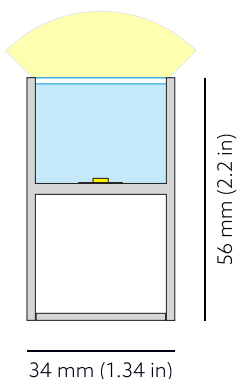

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

SPECTRUM (WHITE LED)

2500K
CRI 80+
3-Step MacAdam

COVER

Opal

LUMINOUS FLUX*

Per segment: 411 lm
Light source (per segment): 828 lm

Per meter/feet: 411 lm/m | 125 lm/ft
RGB only: 223 lm/m

EFFICACY

Luminaire: 29 lm/W
Light source: 58 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, polyurethane

ELECTRICAL

Segment power: 14.4 W
Power per meter/feet: 14.4 W/m
Voltage: 24 VDC

TEMPERATURE

Tc max <75°C (167°F)
Operating: -25°C...+50°C (-13°F...122°F)

OTHER DETAILS

IP67 protection
Dimmable
Install in well-ventilated areas only

DIMENSIONS

Width: 34 mm | 1.34"
Height: 56 mm | 2.20"
Length: 1003 mm | 3.3'