


# NEMAN X - PENDANT CONTINUOUS

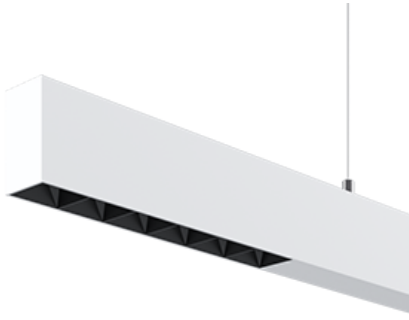

**Neman-X P STA PW X3-05 B D30 927 L500 DALI**  
Start module for continuous line system

Product code: NMX P STA PW X3-05 B D30 927 0500 D  
Article No.: F5PBDCPBBD0500D


see drawings below for real representation



## COLORS




## PHOTOMETRICS



## START MODULE LAYOUT



## TECHNICAL DRAWING

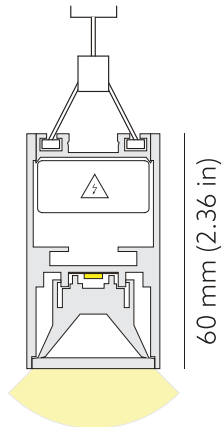

34 mm (1.34 in)

## MOUNTING

Pendant type

## SPECTRUM

2700K  
CRI 90+  
3-Step MacAdam

## OPTICS

30°

## LUMINOUS FLUX\*

Luminaire: 778 Lm  
Light source: 894 Lm

## EFFICACY

Luminaire: 74 Lm/W  
Light source: 85 Lm/W

## LIFETIME

L90B10 60.000h

## DIMMING

DALI, PushDim

## HOUSING

Aluminum, plastic

## ELECTRICAL

Luminaire power: 10.5 W  
220-240 VAC 50/60 Hz  
Integrated driver

## OTHER DETAILS

IP40 ingress protection  
Transparent lead cable - 2m (6.5')  
Suspension cable length - 2m (6.5')

## DIMENSIONS

Width: 34 mm / 1.34"  
Height: 60 mm / 2.36"  
Length: 501.5 mm / 1.6'  
Distance between groups: 50 cm  
Black-out length: 409 mm / 1.34'

## LEDS LAYOUT



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are  $\pm 15\%$ . Allowed measurement uncertainty  $\pm 7\%$ .  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.