


NEMAN X - PENDANT CONTINUOUS

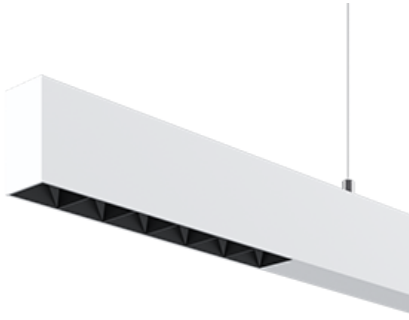

Neman-X P STA PW X3-05 B D30 927 L1000 DALI

Start module for continuous line system

Product code: NMX P STA PW X3-05 B D30 927 1000 D

Article No.: F5PBDCPBBD1000D


see drawings below for real representation



COLORS




PHOTOMETRICS



START MODULE LAYOUT



TECHNICAL DRAWING

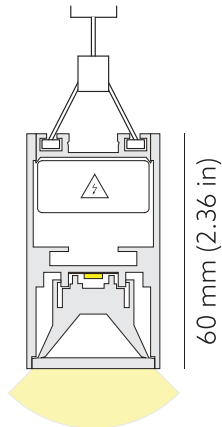

34 mm (1.34 in)

MOUNTING

Pendant type

SPECTRUM

2700K
CRI 90+
3-Step MacAdam

OPTICS

30°

LUMINOUS FLUX*

Luminaire: 1556 Lm
Light source: 1788 Lm

EFFICACY

Luminaire: 74 Lm/W
Light source: 85 Lm/W

LIFETIME

L90B10 60.000h

DIMMING

DALI, PushDim

HOUSING

Aluminum, plastic

ELECTRICAL

Luminaire power: 21 W
220-240 VAC 50/60 Hz
Integrated driver

OTHER DETAILS

IP40 ingress protection
Transparent lead cable - 2m (6.5')
Suspension cable length - 2m (6.5')

DIMENSIONS

Width: 34 mm / 1.34"
Height: 60 mm / 2.36"
Length: 1001.5 mm / 3.3'
Distance between groups: 50 cm
Black-out length: 454 mm / 1.49'

LEDS LAYOUT



* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.