


NEMAN X - PENDANT CONTINUOUS

Neman-X P STA PW X3-05 B D30 927 L1000 DALI
Start module for continuous line system

Product code: NMX P STA PW X3-05 B D30 927 1000 D
Article No.: F5PBDCPBBD1000D

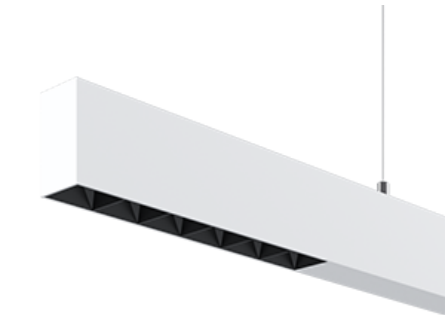


see drawings below for real representation



COLORS




PHOTOMETRICS



START MODULE LAYOUT



TECHNICAL DRAWING

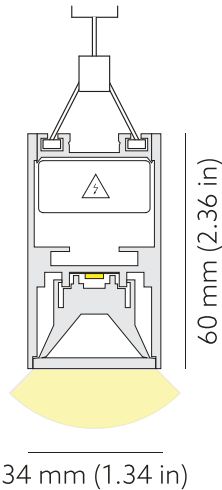

MOUNTING	Pendant type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 1556 Lm Light source: 1788 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 85 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 21 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection Transparent lead cable - 2m (6.5') Suspension cable length - 2m (6.5')
DIMENSIONS	Width: 34 mm / 1.34" Height: 60 mm / 2.36" Length: 1001.5 mm / 3.3' Distance between groups: 50 cm Black-out length: 454 mm / 1.49'
LEDS LAYOUT	

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.