


# NEMAN X - SURFACE CONTINUOUS

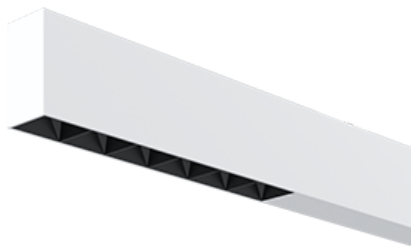

Neman-X S STA PW X3-05 D30 927 L500 DALI  
Start module for continuous line system

Product code: NMX S STA PW X3-05 B D30 927 0500 D  
Article No.: F5SBDPCBBBD0500D


see drawings below for real representation



### COLORS



### PHOTOMETRICS




### SEGMENT TYPE LAYOUT



Start module

### TECHNICAL DRAWING



34 mm (1.34 in)

MOUNTING	Surface type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 778 Lm Light source: 894 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 85 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 10.5 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection
DIMENSIONS	Width: 34 mm / 1.34" Height: 60 mm / 2.36" Length: 501.5 mm / 1.6' Distance between groups: 50 cm Black-out length: 409 mm / 1.34'
LEDS LAYOUT	

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.