


NEMAN X - SURFACE CONTINUOUS

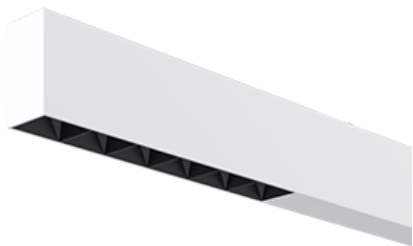

Neman-X S STA PW X3-05 D30 927 L2000 DALI
Start module for continuous line system

Product code: NMX S STA PW X3-05 B D30 927 2000 D
Article No.: F5SBDPCBBBD2000D


see drawings below for real representation



COLORS



PHOTOMETRICS




SEGMENT TYPE LAYOUT



Start module

TECHNICAL DRAWING



34 mm (1.34 in)

MOUNTING	Surface type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 3111 Lm Light source: 3576 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 85 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 42 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection
DIMENSIONS	Width: 34 mm / 1.34" Height: 60 mm / 2.36" Length: 2001.5 mm / 6.6' Distance between groups: 50 cm Black-out length: 477 mm / 1.57'
LEDS LAYOUT	

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.