



## ATLANTIS G2 SIDE

AtlantisG2Side IB RWE.EOP / RGB96/Nx G5 011W L1000

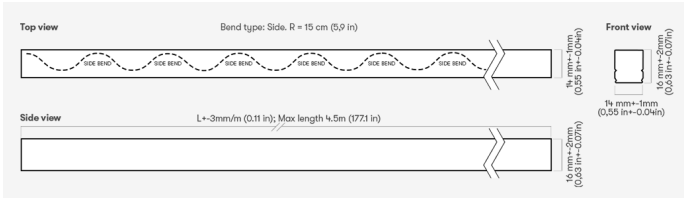

<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LUMINOUS FLUX</b>	Total: 263 Lm/m (80 Lm/ft) Red: 57 Lm/m (17 Lm/ft) Green: 168 Lm/m (51 Lm/ft) Blue: 37 Lm/m (11 Lm/ft)
<b>EFFICACY</b>	23 Lm/W
<b>LIFETIME</b>	L90B10 60.000 h

**CONTROL** Dimmable

**VOLTAGE** 24 VDC  
**WATTAGE** 11.52 W/m | 3.5 W/ft

**CUTTING STEP** 62.5 mm (2.46")  
**OTHER DETAILS** IP67 protection  
Bend radius: 15 cm (5.9")

**TEMPERATURE** Tc max <75°C ( 167°F )  
**OPERATING TEMP.** -25°C...+50°C (-13°F...122°F)

**DIMENSIONS** Width: 14 mm ±1mm (0.55" ±0.04")  
Height: 16 mm ±2mm (0.63" ±0.07")  
Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.