




# WHITE LED STRIPS 56 LEDS/M DELTA

FL-56-4/D3-850

Product code: FL-56-4/D3-850

Article No.: A1AAGAHXX

## PHOTOMETRICS

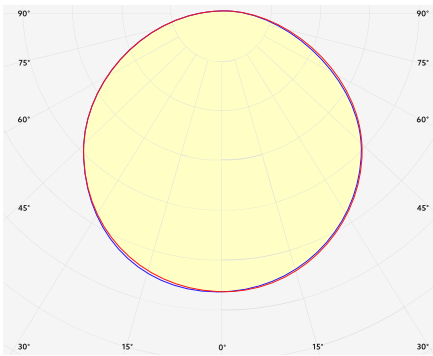

|                      |  |
|----------------------|--|
| <b>LEDs/M</b>        | White<br>56 LEDs/m   |
| <b>SPECTRUM</b>      | 5000K<br>CRI 80+<br>3-Step MacAdam                                   |
| <b>LUMINOUS FLUX</b> | 760 Lm/m<br>232 Lm/ft  |
| <b>EFFICACY</b>      | 158 Lm/W   |
| <b>LIFETIME</b>      | L70B50 50.000 h  |
| <b>DIMMING</b>       | Dimmable   |
| <b>ELECTRICAL</b>    | Power: 4.8 W/m   1.46 W/ft<br>24 VDC                                 |
| <b>TEMPERATURE</b>   | Tc max <75°C ( 167°F )<br>Operating: -25°C...+50°C ( -13°F...122°F ) |
| <b>DIMENSIONS</b>    | Width: 8 mm<br>Height: 2 mm (0.08")                                  |
| <b>PHOTOMETRIC</b>   | 120° beam angle  |
| <b>PACKING</b>       | 10 m, 50 m or customized length per reel                             |
| <b>OTHER</b>         | Cutting step: 125 mm (4.92")<br>Max run: 9 m (30')                   |

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.