


NEMAN X - PENDANT

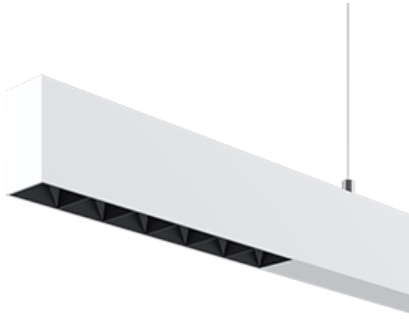

Neman-X P LUM PW X2-3G B D30 930 L1400 DALI

Individual luminaire

Product code: NMX P LUM PW X2-3G B D30 930 1400 D

Article No.: F4PADB3BBBE1400D


see drawings below for real representation




COLORS



PHOTOMETRICS



TECHNICAL DRAWING

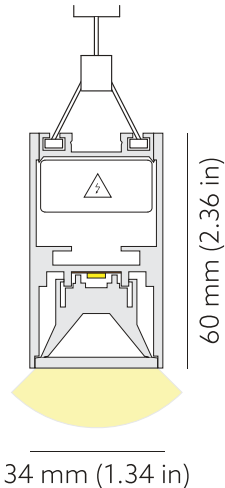

MOUNTING

Pendant type

SPECTRUM

3000K
CRI 90+
3-Step MacAdam

OPTICS

30°

LUMINOUS FLUX*

Luminaire: 1432 Lm
Light source: 1836 Lm

EFFICACY

Luminaire: 69 Lm/W
Light source: 88 Lm/W

LIFETIME

L90B10 60.000h

DIMMING

DALI, PushDim

HOUSING

Aluminum, plastic

ELECTRICAL

Luminaire power: 20.9 W
220-240 VAC 50/60 Hz
Integrated driver

DIMENSIONS

Width: 34 mm / 1.34"
Height: 60 mm / 2.36"
Length: 1403 mm / 4.6'
Black-out length: 609 mm / 2'

OTHER DETAILS

IP40 ingress protection
Transparent lead cable - 2m (6.5')
Suspension cable length - 2m (6.5')

LEDS LAYOUT



* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.