


# NEMAN X - PENDANT

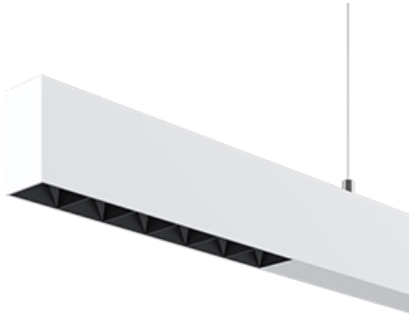

Neman-X P LUM PW X2-3G B D30 935 L1400 DALI

Individual luminaire

Product code: NMX P LUM PW X2-3G B D30 935 1400 D

Article No.: F4PADB3BBBF1400D


see drawings below for real representation




## COLORS



## PHOTOMETRICS



## TECHNICAL DRAWING

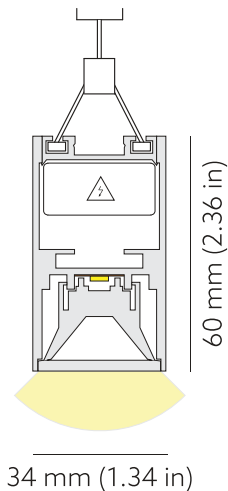

## MOUNTING

Pendant type

## SPECTRUM

3500K  
CRI 90+  
3-Step MacAdam

## OPTICS

30°

## LUMINOUS FLUX\*

Luminaire: 1488 Lm  
Light source: 1908 Lm

## EFFICACY

Luminaire: 71 Lm/W  
Light source: 91 Lm/W

## LIFETIME

L90B10 60.000h

## DIMMING

DALI, PushDim

## HOUSING

Aluminum, plastic

## ELECTRICAL

Luminaire power: 20.9 W  
220-240 VAC 50/60 Hz  
Integrated driver

## DIMENSIONS

Width: 34 mm / 1.34"  
Height: 60 mm / 2.36"  
Length: 1403 mm / 4.6'  
Black-out length: 609 mm / 2'

## OTHER DETAILS

IP40 ingress protection  
Transparent lead cable - 2m (6.5')  
Suspension cable length - 2m (6.5')

## LEDS LAYOUT



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are  $\pm 15\%$ . Allowed measurement uncertainty  $\pm 7\%$ . All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.