





FL-112-1/D4-850

White LED strips

Article No.: A1BNJAHXX

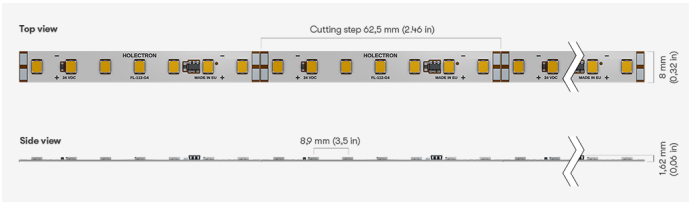

LIGHT TYPE	White
LEDs/M	112 LEDs/m
CCT	5000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	290 Lm/m (88 Lm/ft)
EFFICACY	151 Lm/W
LIFETIME	L70B50 50.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	1.92 W/m 0.59 W/ft

CUTTING STEP	62.5 mm (2.46")
MAX RUN	30.5 m (100')
PACKING	10 m, 50 m or customized length per reel
DIMENSIONS	Width: 8 mm Height: 1.62 mm (0.06")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.