





FL175/DX G4 04W 840

White LED strips

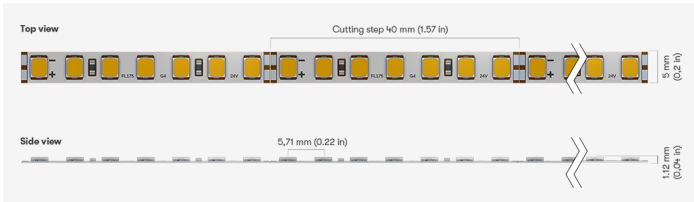

| | |
|--------------------------|----------------------|
| LIGHT TYPE | White |
| LEDs/M | 175 LEDs/m |
| CCT | 4000K |
| CRI | CRI 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | 120° beam angle |
| LUMINOUS FLUX | 692 Lm/m (211 Lm/ft) |
| EFFICACY | 144 Lm/W |
| LIFETIME | L70B50 50.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|---------------------|
| VOLTAGE | 24 VDC |
| WATTAGE | 4.8 W/m 1.46 W/ft |

| | |
|---------------------|--|
| CUTTING STEP | 40 mm (1.57") |
| MAX RUN | 3.52 m (12') |
| PACKING | 10 m, 50 m or customized length per reel |
| DIMENSIONS | Width: 5 mm Height: 1.62 mm (0.06") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |
| STORAGE TEMP. | -25°C...+80°C (-13°F...176°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.