





FL60E/DX G4 01W 840

White LED strips

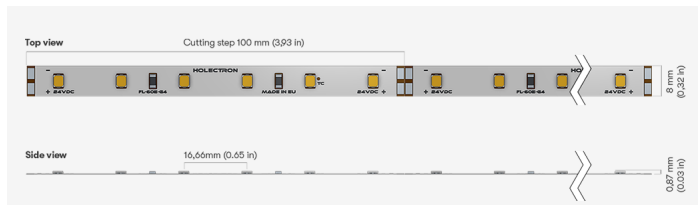

LIGHT TYPE	White
LEDs/M	60 LEDs/m
CCT	4000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	155 Lm/m (47 Lm/ft)
EFFICACY	129 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24 VDC
WATTAGE	1.2 W/m 0.37 W/ft

CUTTING STEP	100 mm (3.94")
MAX RUN	15.5 m (50.9')
PACKING	10 m, 50 m or customized length per reel
DIMENSIONS	Width: 8 mm Height: 0.87 mm (0.03")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.