





FL112/NX G5 04W 840 48V

White LED strips

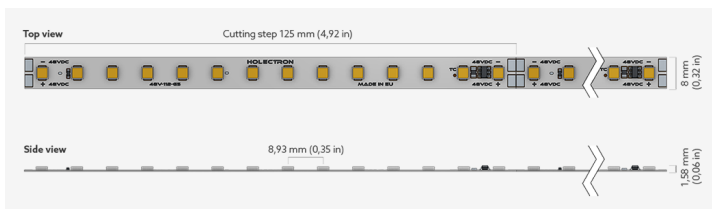

LIGHT TYPE	White
LEDs/M	112 LEDs/m
CCT	4000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
PHOTOMETRIC	120° beam angle
LUMINOUS FLUX	718 Lm/m (219 Lm/ft)
EFFICACY	150 Lm/W
LIFETIME	L90B10 60 000

CONTROL	Dimmable
----------------	----------

VOLTAGE	48-50 VDC
WATTAGE	4.8 W/m 1.5 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	32.5 m (107')
PACKING	10 m, 50 m or customized length per reel
DIMENSIONS	Width: 8 mm Height: 1.58 mm (0.06")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
STORAGE TEMP.	-25°C...+80°C (-13°F...176°F)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.