





TW56/NX G5 09W 820/820

Tunable white LED strips

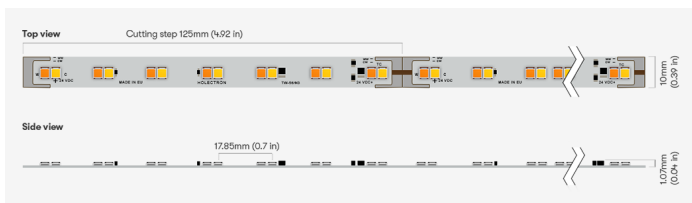

| | |
|--------------------------|-------------------------|
| LIGHT TYPE | Tunable white |
| LEDs/M | 56 LEDs/m |
| CCT | Warm: 2000K Cold: 2000K |
| CRI | Warm: 80+ Cold: 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | 120° beam angle |
| LUMINOUS FLUX | 1002 Lm/m (305 Lm/ft) |
| EFFICACY | 104 Lm/W |
| LIFETIME | L90B10 60.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|---------------------|
| VOLTAGE | 24 VDC |
| WATTAGE | 9.6 W/m 2.93 W/ft |

| | |
|---------------------|--|
| CUTTING STEP | 125 mm (4.92") |
| MAX RUN | 8 m (26') |
| PACKING | 10 m, 50 m or customized length per reel |
| DIMENSIONS | Width: 8 mm Height: 1.58 mm (0.06") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.