



TW2-112-33/N4-827/865

Tunable white LED strips

Article No.: A5BGIADAJ

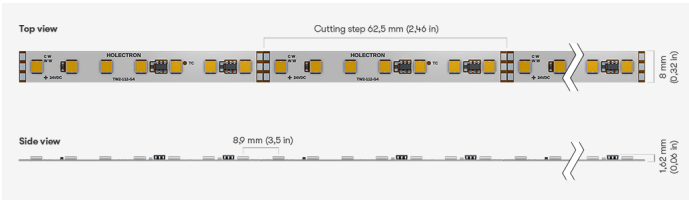

| | |
|--------------------------|-------------------------|
| LIGHT TYPE | Tunable white Dual |
| LEDs/M | 112 LEDs/m |
| CCT | Warm: 2700K Cold: 6500K |
| CRI | Warm: 80+ Cold: 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| PHOTOMETRIC | 120° beam angle |
| LUMINOUS FLUX | 4524 Lm/m (1379 Lm/ft) |
| EFFICACY | 135 Lm/W |
| LIFETIME | L90B10 60.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|-----------------------|
| VOLTAGE | 24 VDC |
| WATTAGE | 33.6 W/m 10.24 W/ft |

| | |
|---------------------|--|
| CUTTING STEP | 62.5 mm (2.46") |
| MAX RUN | 4.5 m (15') |
| PACKING | 10 m, 50 m or customized length per reel |
| DIMENSIONS | Width: 8 mm Height: 1.62 mm (0.06") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.