


NEMAN X TRIMLESS

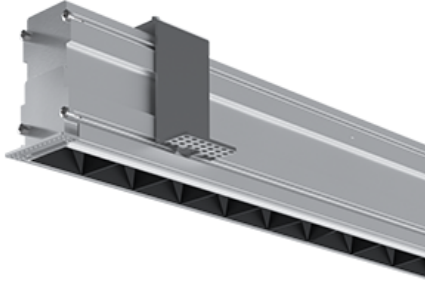

Neman-X T LUM PW X1 B D30 930 DALI

Individual luminaire

Product code: NMX T LUM PW X1 B D30 930 D

Article No.: F3TADABBED


see drawings below for real representation




COLORS



PHOTOMETRICS

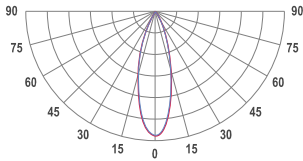

TECHNICAL DRAWING

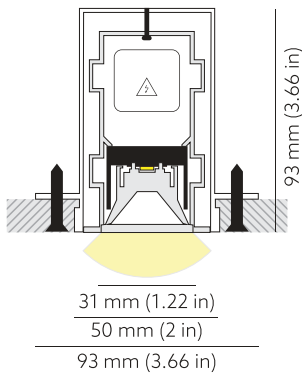

MOUNTING	Trimless type
SPECTRUM	3000K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX	Luminaire: 118 Lm Light source: 162 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 101 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 1.6 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection
DIMENSIONS	Width: 50mm / 2" Height: 93mm / 3.66" Length: 203 mm / 0.67'
MOUNTING HOLE	203 x 53 mm / CuttingHoleLengthFt:value1
LEDS LAYOUT	



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.