


# NEMAN X - SURFACE

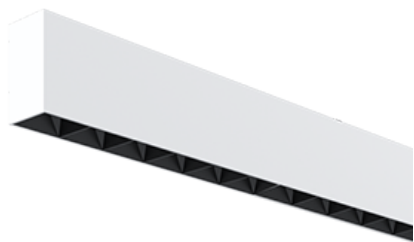

Neman-X S LUM PW X1 B D30 940 ND  
Individual luminaire

Product code: NMX S LUM PW X1 B D30 940 N  
Article No.: F3SADABBBGN


see drawings below for real representation




### COLORS



### PHOTOMETRICS



### TECHNICAL DRAWING

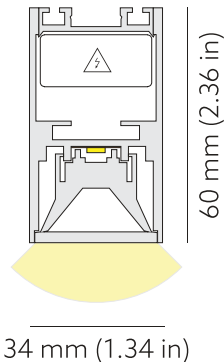

|                |   |
|----------------|---|
| MOUNTING       | Surface type  |
| SPECTRUM       | 4000K<br>CRI 90+<br>3-Step MacAdam                                      |
| OPTICS         | 30°   |
| LUMINOUS FLUX* | Luminaire: 127 Lm<br>Light source: 174 Lm                               |
| EFFICACY       | Luminaire: 79 Lm/W<br>Light source: 109 Lm/W                            |
| LIFETIME       | L90B10 60.000h  |
| DIMMING        | not dimmable  |
| HOUSING        | Aluminum, plastic   |
| ELECTRICAL     | Luminaire power: 1.6 W<br>220-240 VAC 50/60 Hz<br>Integrated driver     |
| OTHER DETAILS  | IP40 ingress protection   |
| DIMENSIONS     | Width: 34 mm / 1.34"<br>Height: 60 mm / 2.36"<br>Length: 186 mm / 0.61' |
| LEDS LAYOUT    |   |



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.