



NERIS PENDANT OPAL DIRECT/INDIRECT

NERIS P LUM OP PW W17C//W17C 827 L1120 DALI

Individual luminaire


Product code: NR P LUM OP PW W17W17 827 1120 D

Article No.: F9PAODCADXX1120D




White body + Opal


PHOTOMETRICS



Individual luminaire layout



TECHNICAL DRAWING

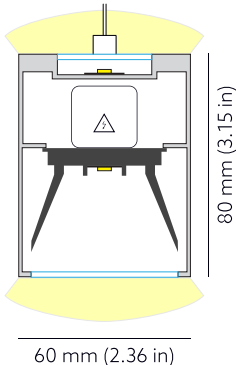

MOUNTING	Pendant direct/indirect type
SPECTRUM	2700K CRI 80+ 3-Step MacAdam
LUMINOUS FLUX*	Luminaire: 4300 Lm Light source: 5936 Lm Direct/Indirect flux proportion: 46/54
EFFICACY	Luminaire: 103 Lm/W Light source: 158 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Opal light surface Extruded aluminum, White color
ELECTRICAL	Luminaire power: 41.8 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP20 ingress protection. Suspension length 2m (6.5') Lead cable 2m (6.5'), transparent
DIMENSIONS	Width: 60 mm / 2.36" Height: 80 mm / 3.15" Length: 1123 mm / 3.7'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.