

NEMAN X - PENDANT

Neman-X P LUM PW X2-3G B D30 927 L1400 DALI

Individual luminaire

Product code: NMX P LUM PW X2-3G B D30 927 1400 D

Article No.: F4PADB3BBBD1400D


see drawings below for real representation




COLORS



PHOTOMETRICS



TECHNICAL DRAWING

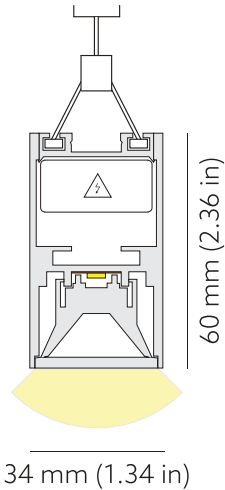

MOUNTING	Pendant type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 1395 Lm Light source: 1788 Lm
EFFICACY	Luminaire: 67 Lm/W Light source: 86 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	DALI, PushDim
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 20.9 W 220-240 VAC 50/60 Hz Integrated driver
DIMENSIONS	Width: 34 mm / 1.34" Height: 60 mm / 2.36" Length: 1403 mm / 4.6' Black-out length: 609 mm / 2'
OTHER DETAILS	IP40 ingress protection Transparent lead cable - 2m (6.5') Suspension cable length - 2m (6.5')

LEDS LAYOUT



* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.