


# NEMAN X - PENDANT

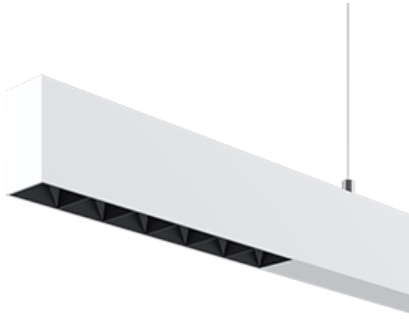

## Neman-X P LUM PW X2-3G B D30 940 L1400 ND

Individual luminaire

Product code: NMX P LUM PW X2-3G B D30 940 1400 N

Article No.: F4PADB3BBBG1400N


see drawings below for real representation




### COLORS



### PHOTOMETRICS



### TECHNICAL DRAWING

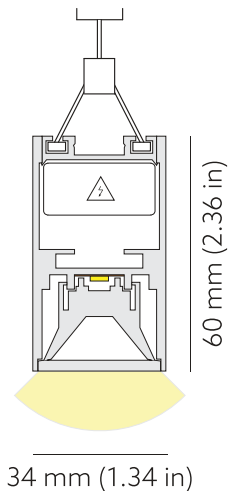

### MOUNTING

Pendant type

### SPECTRUM

4000K  
CRI 90+  
3-Step MacAdam

### OPTICS

30°

### LUMINOUS FLUX\*

Luminaire: 1544 Lm  
Light source: 1980 Lm

### EFFICACY

Luminaire: 74 Lm/W  
Light source: 95 Lm/W

### LIFETIME

L90B10 60.000h

### DIMMING

not dimmable

### HOUSING

Aluminum, plastic

### ELECTRICAL

Luminaire power: 20.9 W  
220-240 VAC 50/60 Hz  
Integrated driver

### DIMENSIONS

Width: 34 mm / 1.34"  
Height: 60 mm / 2.36"  
Length: 1403 mm / 4.6'  
Black-out length: 609 mm / 2'

### OTHER DETAILS

IP40 ingress protection  
Transparent lead cable - 2m (6.5')  
Suspension cable length - 2m (6.5')

### LEDS LAYOUT



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.