

# NEMAN X - PENDANT

Neman-X P LUM PW X2-3G B D30 927 L1400 ND  
Individual luminaire

Product code: NMX P LUM PW X2-3G B D30 927 1400 N  
Article No.: F4PADB3BBBD1400N


see drawings below for real representation




## COLORS



## PHOTOMETRICS



## TECHNICAL DRAWING

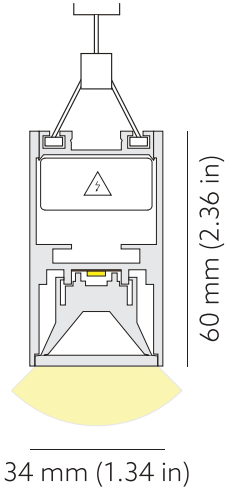

<b>MOUNTING</b>	Pendant type
<b>SPECTRUM</b>	2700K CRI 90+ 3-Step MacAdam
<b>OPTICS</b>	30°
<b>LUMINOUS FLUX*</b>	Luminaire: 1395 Lm Light source: 1788 Lm
<b>EFFICACY</b>	Luminaire: 67 Lm/W Light source: 86 Lm/W
<b>LIFETIME</b>	L90B10 60.000h
<b>DIMMING</b>	not dimmable
<b>HOUSING</b>	Aluminum, plastic
<b>ELECTRICAL</b>	Luminaire power: 20.9 W 220-240 VAC 50/60 Hz Integrated driver
<b>DIMENSIONS</b>	Width: 34 mm / 1.34" Height: 60 mm / 2.36" Length: 1403 mm / 4.6' Black-out length: 609 mm / 2'
<b>OTHER DETAILS</b>	IP40 ingress protection Transparent lead cable - 2m (6.5') Suspension cable length - 2m (6.5')

## LEDS LAYOUT



\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.