


NEMAN X - SURFACE CONTINUOUS

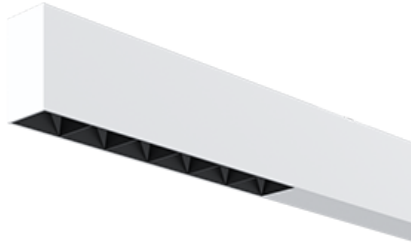

Neman-X S STA PW X3-05 D30 930 L2000 DALI

Start module for continuous line system


Product code: NMX S STA PW X3-05 B D30 930 2000 D

Article No.: F5SBDCPBBBE2000D


see drawings below for real representation



COLORS



PHOTOMETRICS

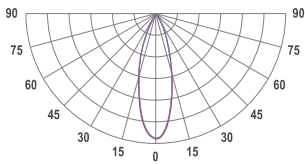


SEGMENT TYPE LAYOUT



Start module

TECHNICAL DRAWING

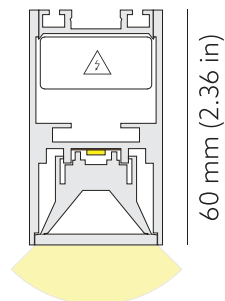

34 mm (1.34 in)

MOUNTING

Surface type

SPECTRUM

3000K
CRI 90+
3-Step MacAdam

OPTICS

30°

LUMINOUS FLUX*

Luminaire: 3195 Lm
Light source: 3672 Lm

EFFICACY

Luminaire: 76 Lm/W
Light source: 87 Lm/W

LIFETIME

L90B10 60.000h

DIMMING

DALI, PushDim

HOUSING

Aluminum, plastic

ELECTRICAL

Luminaire power: 42 W
220-240 VAC 50/60 Hz
Integrated driver

OTHER DETAILS

IP40 ingress protection

DIMENSIONS

Width: 34 mm / 1.34"
Height: 60 mm / 2.36"
Length: 2001.5 mm / 6.6'
Distance between groups: 50 cm
Black-out length: 477 mm / 1.57'

LEDS LAYOUT



* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.