

NEMAN X - TRIMLESS CONTINUOUS


Neman-X T STA PW X3-05 D30 927 L1000 ND

Start module for continuous line system

Product code: NMX T STA PW X3-05 B D30 927 1000 N

Article No.: F5TBDCPBBD1000N

Neman X Trimless luminaire contains changeable light engine. Luminaires lamps can be changed separately from the holding profile.

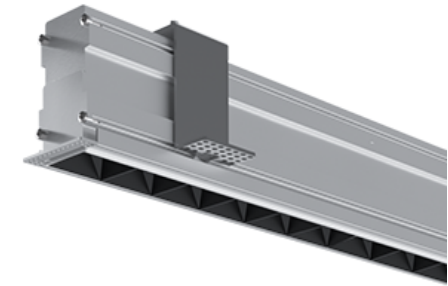


See luminaire drawings below for actual layout




COLORS



PHOTOMETRICS

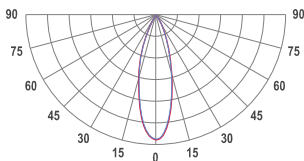


SEGMENT TYPE LAYOUT



Start module

TECHNICAL DRAWING

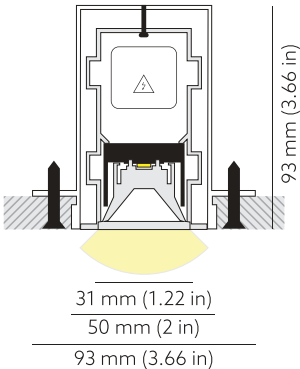

MOUNTING	Trimless type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 1556 Lm Light source: 1788 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 85 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	not dimmable
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 21 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection
DIMENSIONS	Width: 50mm / 2" Height: 93mm / 3.66" Length: 1001.5 mm / 3.3' Distance between groups: 50 cm Black-out length: 454.25 mm / 1.49'
MOUNTING HOLE	1010 x 53 mm / 3.31' x 0.17"
LEDs LAYOUT	

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.