

# NEMAN X - TRIMLESS CONTINUOUS


## Neman-X T STA PW X3-05 D30 927 L3000 ND

Start module for continuous line system

Product code: NMX T STA PW X3-05 B D30 927 3000 N

Article No.: F5TBDCPBBD3000N

Neman X Trimless luminaire contains changeable light engine. Luminaires lamps can be changed separately from the holding profile.

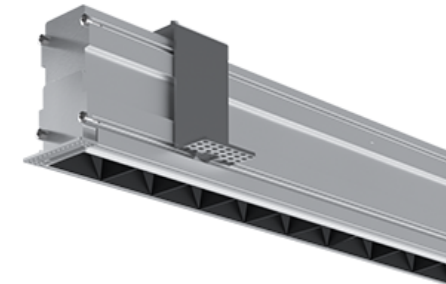


See luminaire drawings below for actual layout




### COLORS



### PHOTOMETRICS




### SEGMENT TYPE LAYOUT



Start module

### TECHNICAL DRAWING

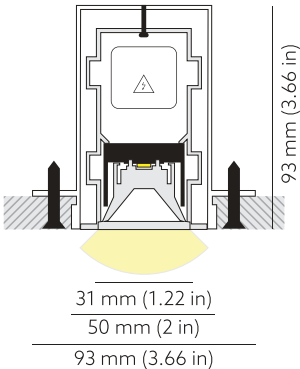

MOUNTING	Trimless type
SPECTRUM	2700K CRI 90+ 3-Step MacAdam
OPTICS	30°
LUMINOUS FLUX*	Luminaire: 4667 Lm Light source: 5364 Lm
EFFICACY	Luminaire: 74 Lm/W Light source: 85 Lm/W
LIFETIME	L90B10 60.000h
DIMMING	not dimmable
HOUSING	Aluminum, plastic
ELECTRICAL	Luminaire power: 63 W 220-240 VAC 50/60 Hz Integrated driver
OTHER DETAILS	IP40 ingress protection
DIMENSIONS	Width: 50mm / 2" Height: 93mm / 3.66" Length: 3001.5 mm / 9.8' Distance between groups: 50 cm Black-out length: 484.75 mm / 1.59'
MOUNTING HOLE	3010 x 53 mm / 9.88' x 0.17"
LEDs LAYOUT	

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.