

ULA L RGBW LIGHT


UlaL A1112 IEC AG OPL / RGBW48/Nx G4 014W L1000
Luminaire segment




COLORS

 Grey housing

PHOTOMETRICS




SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

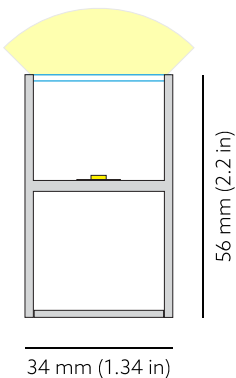

SPECTRUM (WHITE LED)	2200K CRI 80+ 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 416 lm Light source (per segment): 799 lm Per meter/feet: 416 lm/m 127 lm/ft RGB only: 148 lm/m
EFFICACY	Luminaire: 29 lm/W Light source: 55 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, plastic
ELECTRICAL	Segment power: 14.4 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
OTHER DETAILS	IP40 ingress protection Dimmable
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.