

# ULA L RGBW LIGHT


UlaL A1112 IEC AG OPL / RGBW48/Nx G4 014W L1000  
Luminaire segment




## COLORS

 Grey housing

## PHOTOMETRICS




## SEGMENT LAYOUT



Luminaire type segment

## TECHNICAL DRAWING

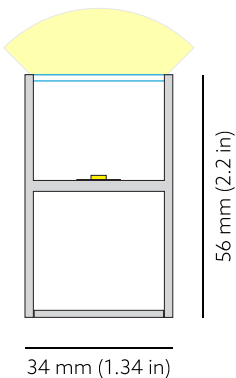

<b>SPECTRUM (WHITE LED)</b>	2500K CRI 80+ 3-Step MacAdam
<b>COVER</b>	Opal
<b>LUMINOUS FLUX*</b>	Per segment: 445 lm Light source (per segment): 856 lm  Per meter/feet: 445 lm/m   136 lm/ft RGB only: 148 lm/m
<b>EFFICACY</b>	Luminaire: 31 lm/W Light source: 59 lm/W
<b>LIFETIME</b>	L90B10 60.000h
<b>HOUSING</b>	Aluminum, plastic
<b>ELECTRICAL</b>	Segment power: 14.4 W Power per meter/feet: 14.4 W/m Voltage: 24 VDC
<b>OTHER DETAILS</b>	IP40 ingress protection Dimmable
<b>DIMENSIONS</b>	Width: 34 mm   1.34" Height: 56 mm   2.20" Length: 1003 mm   3.3'

\* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.