



ULA L TUNABLE WHITE LIGHT


UlaL A1112 IEC PW OPL / TW56/Nx G4 019W 820/835 L1000
Luminaire segment




COLORS

 White housing

PHOTOMETRICS

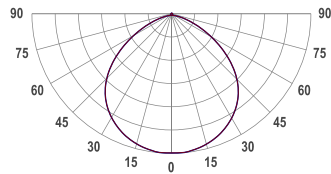


SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

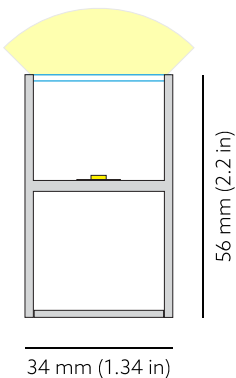

SPECTRUM	Warm LED: CRI 80+ 2000K Cold LED: CRI 80+ 3500K 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 1292 lm Light source (per segment): 2484 lm Per meter/feet: 1292 lm/m 393 lm/ft
EFFICACY	Luminaire: 67 lm/W Light source: 129.375 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, plastic
ELECTRICAL	Segment power: 19.2 W Power per meter/feet: 19.2 W/m Voltage: 24 VDC
OTHER DETAILS	IP40 ingress protection Dimmable
DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.