



ULA L WHITE LIGHT


UlaL A1112 IEC PW OPL / FL-56/Nx G4 09W 820 L1000
Luminaire segment




COLORS

 White housing

PHOTOMETRICS

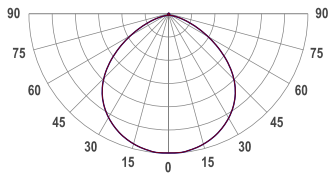


SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

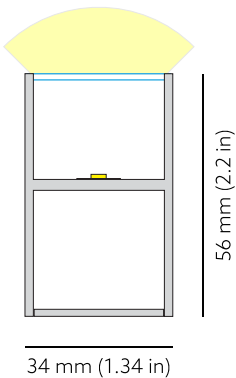

SPECTRUM	2000K CRI 80+ 3-Step MacAdam
COVER	Opal
LUMINOUS FLUX*	Per segment: 525 lm Light source (per segment): 1010 lm Per meter/feet: 525 lm/m 160 lm/ft
EFFICACY	Luminaire: 55 lm/W Light source: 105 lm/W
LIFETIME	L90B10 60.000h
HOUSING	Aluminum, plastic
ELECTRICAL	Segment power: 9.6 W Power per meter/feet: 9.6 W/m Voltage: 24 VDC
OTHER DETAILS	IP40 ingress protection Dimmable

DIMENSIONS	Width: 34 mm 1.34" Height: 56 mm 2.20" Length: 1003 mm 3.3'
-------------------	---

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.