



ULA L WHITE LIGHT


UlaL A1112 IEC PW OPL / FL-56/Nx G4 09W 822 L1000
Luminaire segment




COLORS

 White housing

PHOTOMETRICS

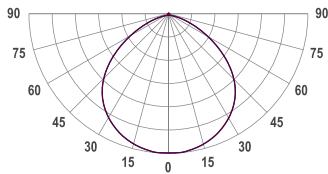


SEGMENT LAYOUT



Luminaire type segment

TECHNICAL DRAWING

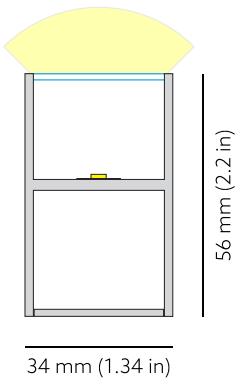

SPECTRUM

2200K
CRI 80+
3-Step MacAdam

COVER

Opal

LUMINOUS FLUX*

Per segment: 568 lm
Light source (per segment): 1093 lm
Per meter/feet: 568 lm/m | 173 lm/ft

EFFICACY

Luminaire: 59 lm/W
Light source: 114 lm/W

LIFETIME

L90B10 60.000h

HOUSING

Aluminum, plastic

ELECTRICAL

Segment power: 9.6 W
Power per meter/feet: 9.6 W/m
Voltage: 24 VDC

OTHER DETAILS

IP40 ingress protection
Dimmable

DIMENSIONS

Width: 34 mm | 1.34"
Height: 56 mm | 2.20"
Length: 1003 mm | 3.3'

* Luminous flux values are based on tests with white housing. Lower luminous flux values might apply for other housing colors.