





# AQUA

## RGBW-48-9/N4-835

RGB+W

Article No.: B14EBKAFX

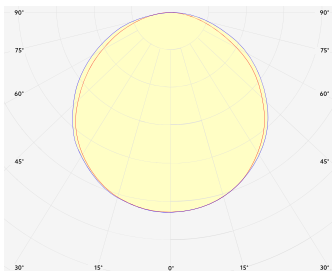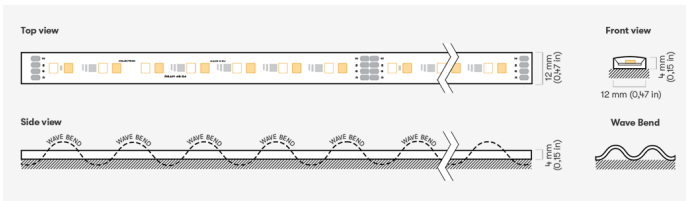

<b>CCT</b>	3500K
<b>CRI</b>	CRI 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LIGHT TYPE</b>	RGBW
<b>LEDs/M</b>	48 LEDs/m
<b>LUMINOUS FLUX</b>	Total: 500 Lm/m (152 Lm/ft) White LED only: 306 Lm/m (93 Lm/ft) RGB LED only: 316 Lm/m (96 Lm/ft)
<b>EFFICACY</b>	52 Lm/W
<b>LIFETIME</b>	L90B10 60.000 h

<b>CONTROL</b>	Dimmable
----------------	----------

<b>VOLTAGE</b>	24 VDC
<b>WATTAGE</b>	9.6 W/m   2.9 W/ft

<b>CUTTING STEP</b>	125 mm (4.92")
<b>MAX RUN</b>	8 m (26')
<b>OTHER DETAILS</b>	IP67 protection

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F)
<b>OPERATING TEMP.</b>	-25°C...+50°C (-13°F...122°F)

<b>DIMENSIONS</b>	Width: 12 mm (0.47") Height: 4 mm (0.16")
-------------------	--

<b>MOUNTING PROFILE</b>	Polycarbonate UV and Salt water resistant
-------------------------	--



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.