





AQUA

AquaG2 IE RWE.CLR / FL56/Nx.24V G5 02W 820 L1000

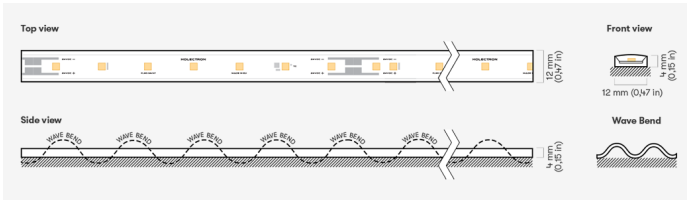

TYPE	White
CCT	2000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LEDs/M	56 LEDs/m
LUMINOUS FLUX	Luminaire: 197 Lm/m Light Source: 245 Lm/m
EFFICACY	Luminaire: 82 Lm/W Light Source: 102 Lm/W
LIFETIME	L90B10 60.000 h
CONTROL	Dimmable
VOLTAGE	24V DC
WATTAGE	2.4 W/m 0.73 W/ft
CUTTING STEP	125 mm (4.92")
MAX RUN	18.5 m (61')
OTHER DETAILS	IP67 protection
TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)
DIMENSIONS	Width: 12 mm (0.47") Height: 4 mm (0.16")
MOUNTING PROFILE	Polycarbonate UV and Salt water resistant



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.