





AQUA

AquaG2 IE RWE.CLR / FL56/Nx.24V G5 02W 835 L1000

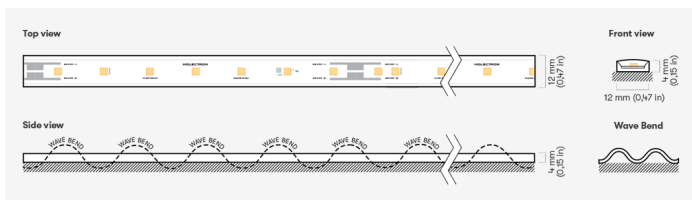

TYPE	White
CCT	3500K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LEDs/M	56 LEDs/m
LUMINOUS FLUX	Luminaire: 288 Lm/m Light Source: 358 Lm/m
EFFICACY	Luminaire: 120 Lm/W Light Source: 149 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
----------------	----------

VOLTAGE	24V DC
WATTAGE	2.4 W/m 0.73 W/ft

CUTTING STEP	125 mm (4.92")
MAX RUN	18.5 m (61')
OTHER DETAILS	IP67 protection

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)

DIMENSIONS	Width: 12 mm (0.47") Height: 4 mm (0.16")
-------------------	--

MOUNTING PROFILE	Polycarbonate UV and Salt water resistant
-------------------------	--



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.