



# ATLANTIS SIDE

FL112-4/N5-822

White

Article No.: B2S1BAKABXX

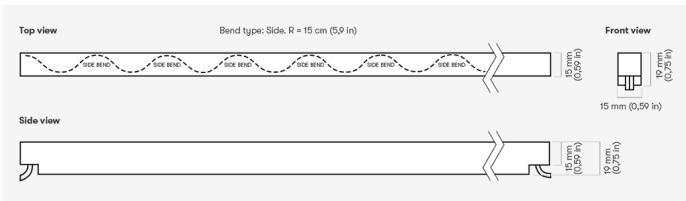

CCT	2200K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	282 Lm/m (86 Lm/ft)
EFFICACY	59 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
---------	----------

VOLTAGE	24 VDC
WATTAGE	4.8 W/m   1.46 W/ft

CUTTING STEP	62.5 mm (2.46")
MAX RUN	5 m (16')
OTHER DETAILS	IP67 protection Bend radius: 15 cm (5.9")

TEMPERATURE	Tc max <75°C ( 167°F )
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)

DIMENSIONS	Width: 15 mm ±1mm (0.59" ±0.04") Height: 19.5 mm ±2mm(0.77" ±0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)
------------	--



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.