



# ATLANTIS SIDE

FL112-4/N5-840

White

Article No.: B2S1BAKAGXX

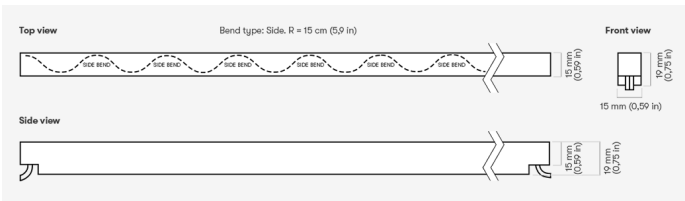

|                   |                      |
|-------------------|----------------------|
| CCT               | 4000K                |
| CRI               | CRI 80+              |
| COLOR CONSISTENCY | 3-Step MacAdam       |
| LUMINOUS FLUX     | 382 Lm/m (116 Lm/ft) |
| EFFICACY          | 80 Lm/W              |
| LIFETIME          | L90B10 60.000 h      |

CONTROL Dimmable

VOLTAGE 24 VDC  
 WATTAGE 4.8 W/m | 1.46 W/ft

CUTTING STEP 62.5 mm (2.46")  
 MAX RUN 5 m (16')  
 OTHER DETAILS IP67 protection  
 Bend radius: 15 cm (5.9")

TEMPERATURE Tc max <75°C ( 167°F )  
 OPERATING TEMP. -25°C...+50°C (-13°F...122°F)

DIMENSIONS Width: 15 mm ±1mm (0.59" ±0.04")  
 Height: 19.5 mm ±2mm(0.77" ±0.07")  
 Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
 All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.