



# ATLANTIS SIDE

AtlantisG2Side IB RWE.EOP / TW2 112/Nx G5 09W 827 L1000

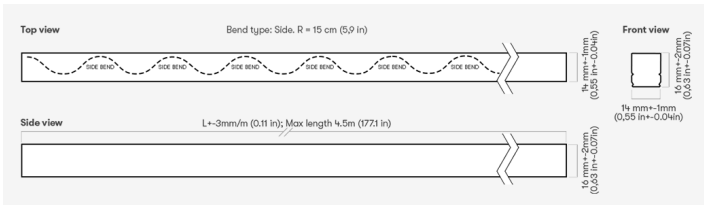

<b>CCT</b>	Warm: 2700K Cold: 5700K
<b>CRI</b>	Warm: 80+ Cold: 80+
<b>COLOR CONSISTENCY</b>	3-Step MacAdam
<b>LUMINOUS FLUX</b>	736 Lm/m (224 Lm/ft)
<b>EFFICACY</b>	77 Lm/W
<b>LIFETIME</b>	L90B10 60.000 h

<b>CONTROL</b>	Dimmable
----------------	----------

<b>VOLTAGE</b>	24 VDC
<b>WATTAGE</b>	9.6 W/m   2.93 W/ft

<b>CUTTING STEP</b>	62.5 mm (2.46") IP67 protection
<b>OTHER DETAILS</b>	Bend radius: 15 cm (5.9")

<b>TEMPERATURE</b>	Tc max <75°C ( 167°F )
<b>OPERATING TEMP.</b>	-25°C...+50°C ( -13°F...122°F )

<b>DIMENSIONS</b>	Width: 14 mm +1mm (0.55" +- 0.04") Height: 16 mm +2mm (0.63" +-0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)
-------------------	--



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.