



## ATLANTIS G2 SIDE

AtlantisG2Side IB RWE.EOP / FL112/Nx G4 01W 835 L1000

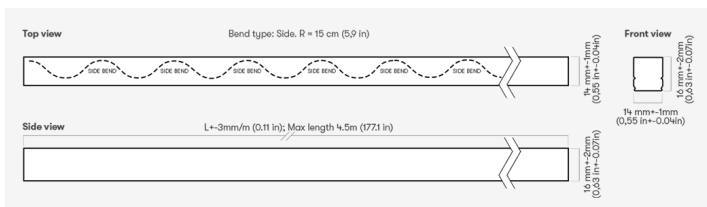

CCT	3500K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	150 Lm/m (46 Lm/ft)
EFFICACY	78 Lm/W
LIFETIME	L70B50 50.000 h

CONTROL	Dimmable
---------	----------

VOLTAGE	24 VDC
WATTAGE	1.92 W/m   0.59 W/ft

CUTTING STEP	62.5 mm (2.46")
OTHER DETAILS	IP67 protection Bend radius: 15 cm (5.9")

TEMPERATURE	Tc max <75°C ( 167°F )
OPERATING TEMP.	-25°C...+50°C ( -13°F...122°F )

DIMENSIONS	Width: 14 mm ±1mm (0.55" ±0.04") Height: 16 mm ±2mm (0.63" ±0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)
------------	---



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.