



ATLANTIS G2 SIDE

AtlantisG2Side IB RWE.EOP / FL112/Nx G5 04W 830 L1000

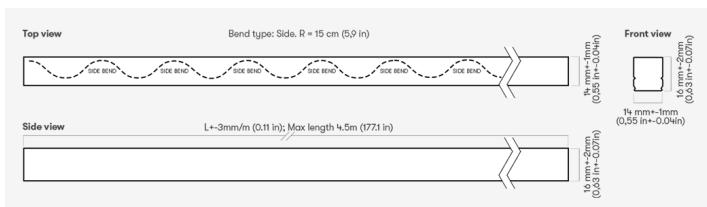

| | |
|--------------------------|----------------------|
| CCT | 3000K |
| CRI | CRI 80+ |
| COLOR CONSISTENCY | 3-Step MacAdam |
| LUMINOUS FLUX | 391 Lm/m (119 Lm/ft) |
| EFFICACY | 82 Lm/W |
| LIFETIME | L90B10 60.000 h |

| | |
|----------------|----------|
| CONTROL | Dimmable |
|----------------|----------|

| | |
|----------------|---------------------|
| VOLTAGE | 24 VDC |
| WATTAGE | 4.8 W/m 1.46 W/ft |

| | |
|----------------------|--|
| CUTTING STEP | 62.5 mm (2.46") |
| OTHER DETAILS | IP67 protection Bend radius: 15 cm (5.9") |

| | |
|------------------------|---------------------------------|
| TEMPERATURE | Tc max <75°C (167°F) |
| OPERATING TEMP. | -25°C...+50°C (-13°F...122°F) |

| | |
|-------------------|---|
| DIMENSIONS | Width: 14 mm ±1mm (0.55" ±0.04") Height: 16 mm ±2mm (0.63" ±0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m) |
|-------------------|---|



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.