



## ATLANTIS G2 SIDE

AtlantisG2Side IB RWE.EOP / FL112/Nx G5 04W 835 L1000

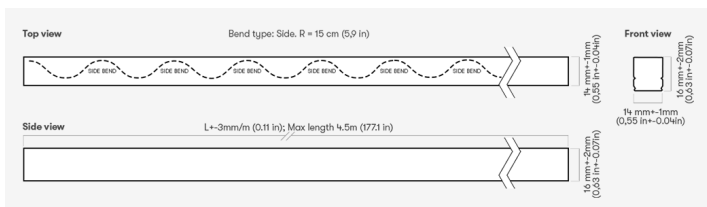

|                   |                      |
|-------------------|----------------------|
| CCT               | 3500K                |
| CRI               | CRI 80+              |
| COLOR CONSISTENCY | 3-Step MacAdam       |
| LUMINOUS FLUX     | 401 Lm/m (122 Lm/ft) |
| EFFICACY          | 83 Lm/W              |
| LIFETIME          | L90B10 60.000 h      |

|         |          |
|---------|----------|
| CONTROL | Dimmable |
|---------|----------|

|         |                     |
|---------|---------------------|
| VOLTAGE | 24 VDC              |
| WATTAGE | 4.8 W/m   1.46 W/ft |

|               |  |
|---------------|--|
| CUTTING STEP  | 62.5 mm (2.46")                              |
| OTHER DETAILS | IP67 protection<br>Bend radius: 15 cm (5.9") |

|                 |                                 |
|-----------------|---------------------------------|
| TEMPERATURE     | Tc max <75°C ( 167°F )          |
| OPERATING TEMP. | -25°C...+50°C ( -13°F...122°F ) |

|            |   |
|------------|---|
| DIMENSIONS | Width: 14 mm ±1mm (0.55" ±0.04")<br>Height: 16 mm ±2mm (0.63" ±0.07")<br>Length: up to 4.5m ±3mm/meter (15" ±0.11"/m) |
|------------|---|



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.