



ATLANTIS G2 SIDE

AtlantisG2Side IB RWE.EOP / FL112/Nx G5 04W 830 L1000

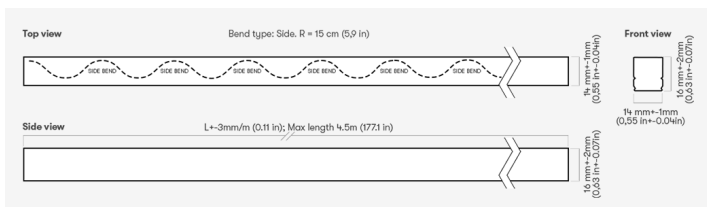

CCT	3000K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	391 Lm/m (119 Lm/ft)
EFFICACY	82 Lm/W
LIFETIME	L90B10 60.000 h

CONTROL	Dimmable
---------	----------

VOLTAGE	24 VDC
WATTAGE	4.8 W/m 1.46 W/ft

CUTTING STEP	62.5 mm (2.46")
OTHER DETAILS	IP67 protection Bend radius: 15 cm (5.9")

TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (-13°F...122°F)

DIMENSIONS	Width: 14 mm ±1mm (0.55" ±0.04") Height: 16 mm ±2mm (0.63" ±0.07") Length: up to 4.5m ±3mm/meter (15" ±0.11"/m)
------------	-----------------------------------------------------------------------------------------------------------------------



Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%. All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.